



## Cut-out for Open Link Fuse


### 15/27/38kV

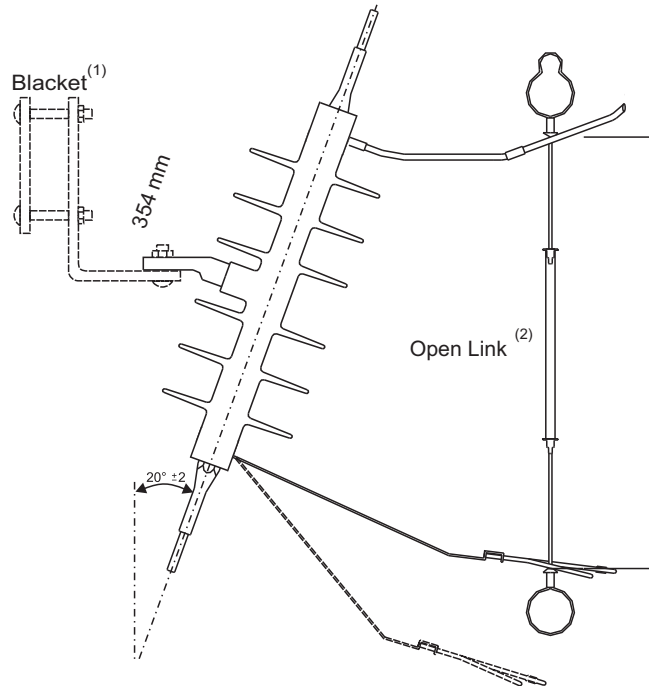

**Polymer Insulator**

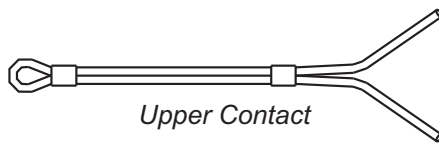

Upper Contact

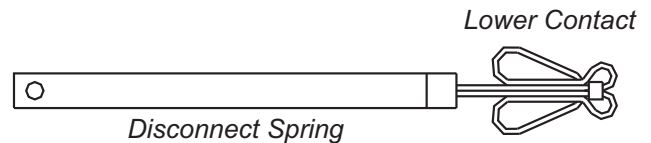

Disconnect Spring

Illustrative

### Standards

- NBR 8124 (PB 995)
- IEC 060282-2
- ANSI C37-41
- Contact us about other standards and currents.

#### Upper Contact

Copper Alloy  
Tin Plated

#### Lower Contact

Copper Alloy  
Tin Plated

#### Disconnect Spring

Bronze  
Ribbon

#### Packaging

##### Individual

01 unit cardboard box

##### Collective

Cardboard box

Insulator	Rated Voltage	Rated Current	BIL	Creepage Distance	Weight	Code
Polymer	15 kV	50 A	110 kV	360 mm	1,540 kg	CFP15MD
Polymer	27 kV	50 A	150 kV	570 mm	1,700 kg	CFP27MD
Polymer	38 kV	50 A	150 kV	570 mm	1,700 kg	CFP38MD

(1) Optional bracket

(2) Not included