



Fuse Link Type K 11kV / 38kV

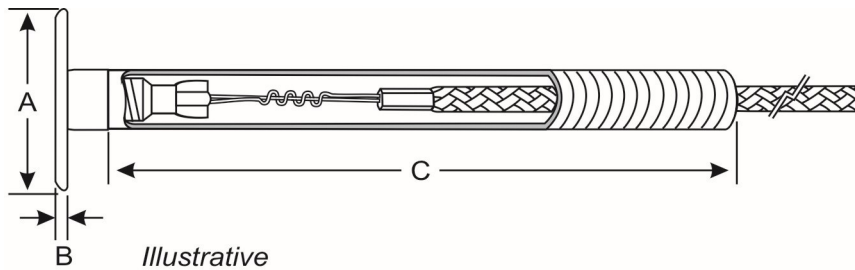

1. Application	Products for Electric Energy Protection	
2. Standard	NBR 7282:2011; ANSI C37-41; ANSI C37-42; IEC 060282-2	
3. Nominal current	1A; 2A; 3A; 5A; 6A; 8A; 10A; 12A; 15A; 20A; 25A; 30A; 40A; 50A	
4. Type and speed	K	
5. Voltage rate	11kV/38kV	
6. Head	Diameter (A)	19,0 ± 0,3 mm
	Thickness (B)	Min. 2,0 mm / Max. 4,0 mm
	Material	Silver plated copper
	Type	Solid or Removable
7. Protector tube	Length (C)	142,0 ± 1,0 mm
	Material	Vulcanized fiber reinforced with fiberglass
8. Flexible cable	Diameter	Maximum 5,0 mm
	Material	Tinned copper wires
9. Overall length	From 500 mm (20") to 787 mm (31")	
10. Quality	Quality management system certified	ISO 9001:2015 SGS Certification
	Breaking capacity essays	CEPEL/POWERTECH
	Standard type essays	INDEL laboratories
	Standard routine essays	INDEL laboratories
11. Packing	Individual	Sealed plastic bag or Paper box
	Collective	Carton box

* We produce with Button Head in 12,5 mm and Washer


Fuse Link Type K 11kV / 38kV

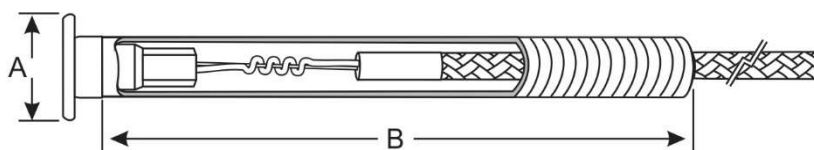

Illustrative

1. Application	Products for Electric Energy Protection	
2. Standard	NBR 7282:2011; ANSI C37-41; ANSI C37-42; IEC 060282-2	
3. Nominal current	65A; 80A; 100A	
4. Type and speed	K	
5. Voltage rate	11kV/38kV	
6. Head	Diameter (A)	19,0 ± 0,3 mm
	Thickness	4,0 mm maximum
	Material	Silver plated copper
	Type	Solid or Removable
7. Protective Tube	Length (B)	142,0 ± 1,0 mm
	Material	Vulcanized fiber coated with paper dielectric
8. Flexible cable	Diameter	Maximum 8,0 mm
	Material	Tinned copper wires
9. Overall length	From 500 mm (20") to 787 mm (31")	
10. Quality	Quality management system certified	ISO 9001:2015 SGS Certification
	Breaking capacity essays	CEPEL/POWERTECH
	Standard type essays	INDEL laboratories
	Standard routine essays	INDEL laboratories
11. Packing	Individual	Sealed plastic bag or Paper box
	Collective	Carton box

Fuse Link Type K 11kV / 38kV

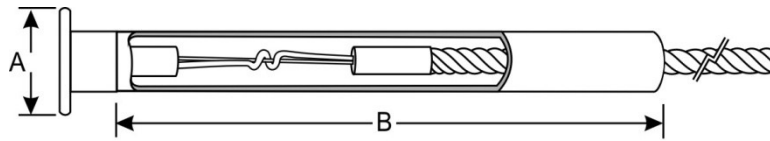

Illustrative

1. Application		Products for Electric Energy Protection
2. Standard		NBR 7282:2011; ANSI C37-41; ANSI C37-42; IEC 060282-2
3. Nominal current		140A; 200A
4. Type and speed		K
5. Voltage rate		11kV/38kV
6. Head	Diameter (A)	25,0 ± 0,4 mm
	Thickness	4,0 mm maximum
	Material	Silver plated copper
	Type	Solid or Removable
7. Protective tube – Not necessary	Length (B)	142,0 ± 1,0 mm
	Material	Vulcanized fiber coated with paper dielectric
8. Flexible cable	Diameter	Maximum 9,5 mm
	Material	Tinned copper wires
9. Overall length		From 500 mm (20") to 787 mm (31")
10. Quality	Quality management system certified	ISO 9001:2015 SGS Certification
	Standard type essays	INDEL laboratories
	Standard routine essays	INDEL laboratories
11. Packing	Individual	Sealed plastic bag or Paper box
	Collective	Carton box